




ULTRA 725

Dual 15" Full Range Speaker

ULTRA POWER
ULTRA PERFORMANCE

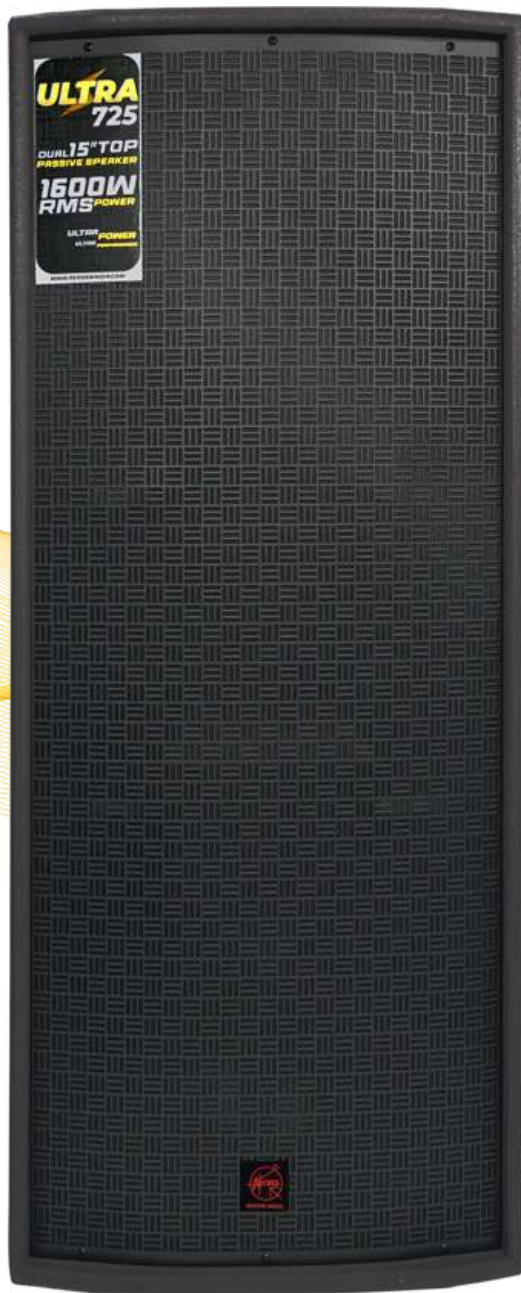

1600W
RMS POWER



2x15"
WITH 4" VC



1x1.5" EXIT
WITH 3" VC



4ohm
IMPEDANCE






ULTRA 725

Dual 15" Full Range Speaker

Technical Specifications

	Design	Dual 15" Full Range Speaker
Components	LF Driver	2x15" Driver with 4" voice coil
	HF Driver	1x1.5" Throat Driver with 3" voice coil
	RMS Power	1600W
	Peak Power	6400W
	Frequency Range	40Hz-19kHz
	Impedance	4 ohms
	Sensitivity	98dB
	Max SPL	135dB
	Crossover Frequency	1.2kHz
	Dispersion (H x V)	90x60 Degree
	Connectors	2xSpeakON NL4
	Enclosure Material	Plywood
	Paint Finish	Scratch Resistant Sand Paint
	Dimensions	472x580x1126mm
	Net Weight	65.4Kg

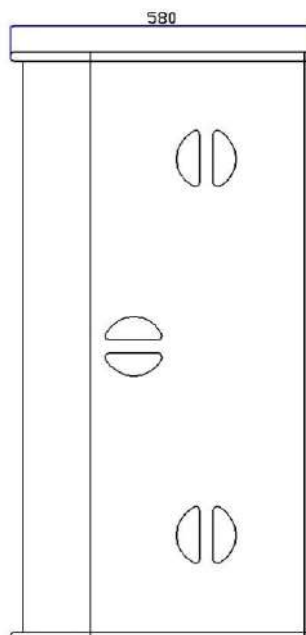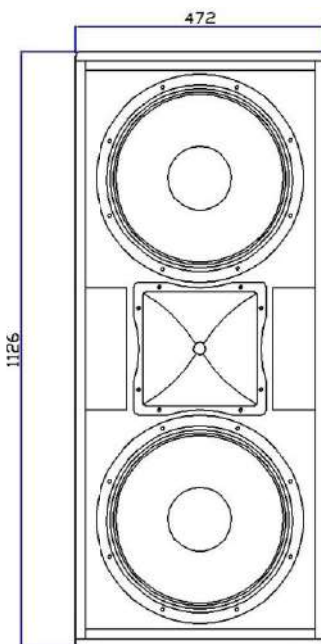

FOR MORE INFO & CATALOG

