




**AERONS (INDIA)**


# D2X SERIES

Professional Power Amplifier

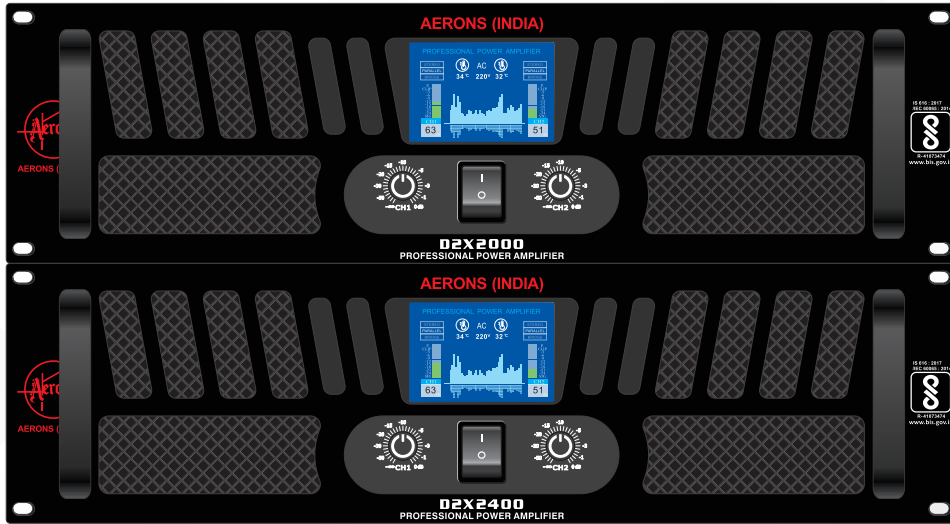

*Pure Power, Perfect Clarity*

## DIGITAL DISPLAY

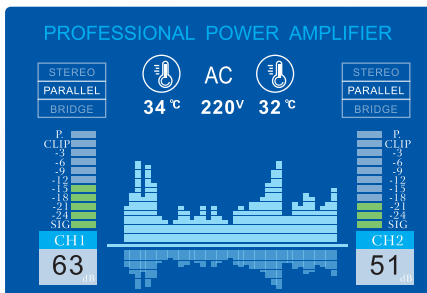

**CLASS H**  
CIRCUIT

## D2X2000 D2X2400

8Ω Stereo Power	900W	1200W
4Ω Stereo Power	1500W	1900W
2Ω Stereo Power	2000W	2400W
8Ω Bridge Power	3000W	3800W
4Ω Bridge Power	4000W	4800W
Output Circuitry	CLASS H	
Frequency response (1W@8Ω)	20Hz-20kHz +1/-1Db	
THD+N (20Hz-20kHz for 1W THD+N)	<0.035%	
Damping factor	≥500	
S/N rate	≥105dB	
Input Sensitivity	0.7V/ 1V/ 1.4V	
Input impedance	>10KΩ, Balance or Unbalanced, All Models	
Input Connector	Male XLR, Female XLR	
Output Connector	2x NL4 SpeakON +Binding Post	
Input Mode	Stereo/ Parallel/ Bridge,	
Dimensions	483x487x132mm	
Net Weight	25 Kgs	29 Kgs
Gross Weight	28 Kgs	32 Kgs

[www.aeronsindia.com](http://www.aeronsindia.com)