









The Ak608 is a high-performance passive speaker built for professional sound applications. It features a robust, premium-grade birch plywood cabinet with a durable premium paint finish, ensuring long-lasting protection against wear and tear. Designed for versatility, it excels in live sound, installations, and portable PA systems.


Key Specifications:

- LF Driver: 8-inch LF driver with a 35mm voice coil, providing powerful and responsive bass.
- HF Driver: 1-inch HF driver with a 64mm voice coil, delivering clear and accurate highs.
- Power Rating: 250W RMS, ensuring consistent output for demanding audio environments.
- Maximum SPL: Produces up to 120 dB, making it suitable for large venues and high-volume settings.
- Durable Construction: Built with high-quality birch plywood and finished with Premium paint for enhanced durability and protection.

The Ak608 strikes a balance between performance, durability, and design, making it an ideal choice for sound professionals seeking reliability and quality.





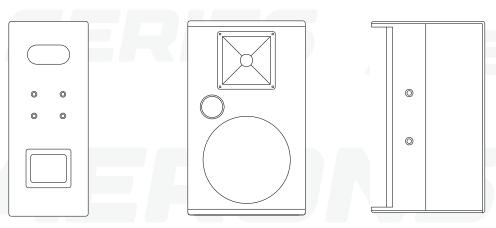

TECHNICAL SPECIFICATIONS

Design 8" 2-Way Bass reflex Passive

Speaker

RMS Power | 250W

Peak Power | 1000W

Freq. Response (-3dB) 68 Hz-18kHz(±3dB)

Drivers 1x8" Ferrite LF driver/ 35mm VC

1x1" HF driver/ 34mm VC

Sensitivity | 96dB 1watt/1 metre

SPL 114dB

Peak SPL | 120dB

Impedance 8 ohms nominal

Input Connectors 2×Speakon NL4

Dispersion (HxV) 70x90

Cabinet | Premium Grade Birch Plywood

with Black paint

Front grille | Steel grille with anti-corrosion

coating

Colour Black

Dimensions (W)592mm×(D)342mm×(H)485mm

Net weight | 7.6kg